LIGHTBARS

CLASSIC TITAN LED LIGHTBAR RANGE

CLASSIC TITAN LED LIGHTBAR RANGE

CUSTOMISATION
Every **Classic TITAN** LED lightbar is designed by our in-house engineers. Choose from six standard lengths and add further optional extras to suit your exact requirements.

LEAD TIMES
The **Classic TITAN** LED lightbar is manufactured at our UK production facility which means quicker responses, faster production times and no long delivery lead-times.

QUALITY CONTROL
Our fully trained and dedicated production team ensure every **Classic TITAN** is manufactured to the highest standards and 100% checked prior to despatch giving you full confidence.

Selectable CAP168 Flash Pattern

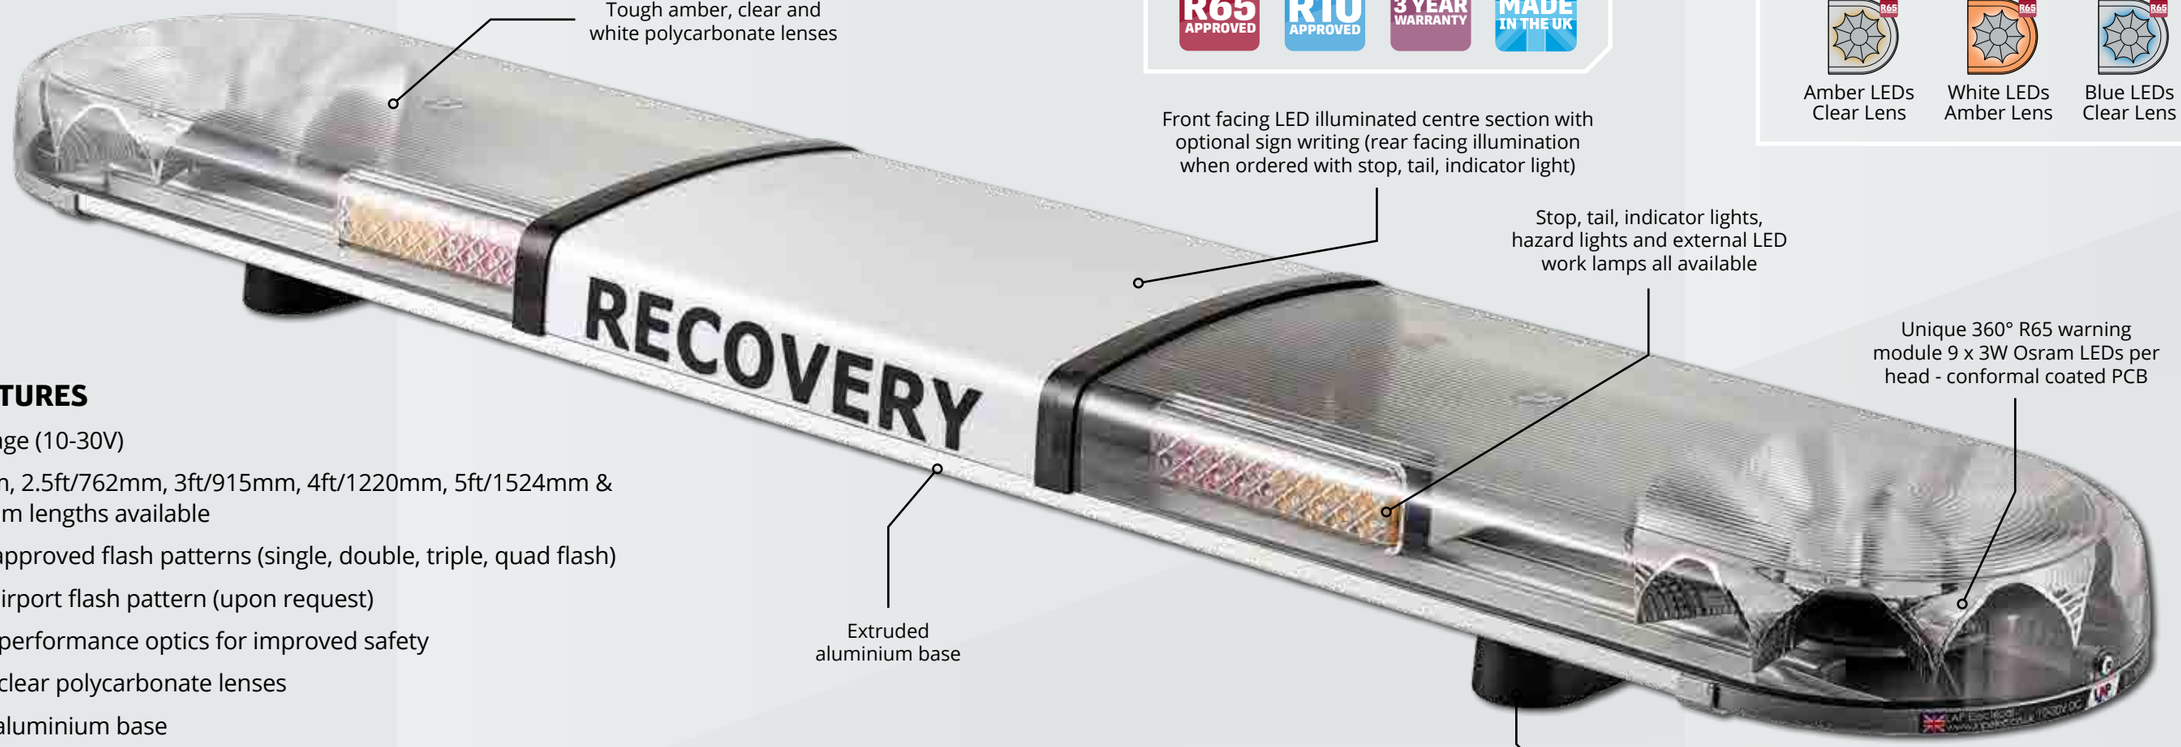

Tough amber, clear and white polycarbonate lenses

Front facing LED illuminated centre section with optional sign writing (rear facing illumination when ordered with stop, tail, indicator light)

Stop, tail, indicator lights, hazard lights and external LED work lamps all available

Unique 360° R65 warning module 9 x 3W Osram LEDs per head - conformal coated PCB

Extruded aluminium base

Adjustable heavy duty rubber mounting feet

KEY POINTS

R65 APPROVED · R10 APPROVED · 3 YEAR WARRANTY · MADE IN THE UK

POSSIBLE LENS / LED COLOUR COMBINATIONS

- Amber LEDs Clear Lens
- White LEDs Amber Lens
- Blue LEDs Clear Lens

MAIN FEATURES

- Multi-voltage (10-30V)
- 2ft/600mm, 2.5ft/762mm, 3ft/915mm, 4ft/1220mm, 5ft/1524mm & 6ft/1828mm lengths available
- Four R65 approved flash patterns (single, double, triple, quad flash)
- Optional airport flash pattern (upon request)
- 360° high performance optics for improved safety
- Amber or clear polycarbonate lenses
- Extruded aluminium base
- Fully encapsulated electronic control module
- Long life LED technology
- Amber, clear or white centre sections available
- 4-bolt mounting fix / high rise feet option
- Extreme temperature reliability -30° to +50°
- 2ft magnetic models available (40mph max. speed)
- 2.5 metre multi-core cable

Components	Current Consumption @ 12V	Current Consumption @ 24V
R65 LED Module (x1)	2.0A	1.0A
Centre Illumination (x1)	0.4A	0.2A
Alley Light (x1)	0.3A	0.2A
Hazard Light (x1)	0.3A	0.2A
Stop, Tail, Indicator (x1)	0.6A	0.3A
LED Worklamp (x1)	1.0A	0.5A

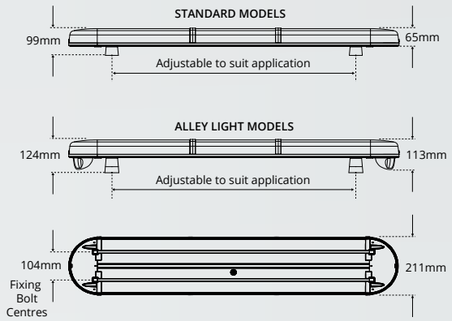

Model shown: LB482AC/IS

CUSTOMISE YOUR CLASSIC TITAN

LED Stop, Tail, Indicator Light

External LED Alley Lights

Amber Lens with White LEDs


Front & Rear Hazard Lights

100mm & 150mm 'Z' Shaped Brackets

Opaque/Illuminated Centre & Signage

External LED Work Lamps

2 Head or 4 Head Lightbar Options

CLASSIC TITAN LED LIGHTBAR RANGE

CLASSIC TITAN MODEL GUIDE AMBER LEDs / CLEAR LENS

Reflector Module | Centre Illumination (I) | Opaque White Centre (O) | Stop, Tail, Indicator Light (S) | Hazard Light (H) | Magnetic (MAG) | External Alley Light (A) | External LED Worklamps (X)

Lightbar Length - 2ft/610mm - 2 x LED Heads

LB242AC

LB242AC/MAG

Lightbar Length - 2.5ft/762mm - 2 x LED Heads


LB302AC


LB302AC/H

LB302AC/S

Lightbar Length - 3ft/915mm - 2 x LED Heads

LB362AC

LB362AC/O

LB362AC/I


LB362AC/H

LB362AC/S


LB362AC/A

LB362AC/OA


LBH362AC/SH

Lightbar Length - 4ft/1220mm - 2 x LED Heads

LB482AC

LB482AC/O

LB482AC/I

LB482AC/H

LB482AC/HX

LB482AC/S

LB482AC/OH

LB482AC/OS


LB482AC/OX

LB482AC/IA

LB482AC/IH

LB482AC/IHH

LB482AC/IS

LB482AC/SH

LB482AC/SHA

LB482AC/OSH

LB482AC/ISH

LB482AC/ISHA

Lightbar Length - 4ft/1220mm - 4 x LED Heads

LB484AC

LB484AC/O

LB484AC/I

Lightbar drawings for illustration purposes only.

CLASSIC TITAN LED LIGHTBAR RANGE

CLASSIC TITAN MODEL GUIDE AMBER LEDs / CLEAR LENS

Reflector Module | Centre Illumination (I) | Opaque White Centre (O) | Stop, Tail, Indicator Light (S) | Hazard Light (H) | Magnetic (MAG) | External Alley Light (A) | External LED Worklamps (X)

Lightbar Length - 5ft/1524mm - 2 x LED Heads

LB602AC

LB602AC/O

LB602AC/I

LB602AC/H

LB602AC/S

LB602AC/SH

LB602AC/OH

LB602AC/OS

LB602AC/OSH

LB602AC/IH

LB602AC/IS

LB602AC/ISH

Lightbar Length - 5ft/1524mm - 4 x LED Heads

LB604AC

LB604AC/O

LB604AC/I

LB604AC/H

LB604AC/S

LB604AC/SH

LB604AC/IS

LB604AC/ISH

LB604AC/ISHA

Lightbar Length - 6ft/1828mm - 4 x LED Heads


LB724AC


LB724AC/O


LB724AC/I


LB724AC/S


LB724AC/OS


LB724AC/OSH


LB724AC/ISH


LB724AC/ISHA

Lightbar drawings for illustration purposes only.

CLASSIC TITAN MODEL GUIDE WHITE LEDs / AMBER LENS

CLASSIC TITAN LED LIGHTBAR RANGE

Reflector Module | Centre Illumination (I) | Opaque White Centre (O) | Stop, Tail, Indicator Light (S) | Hazard Light (H) | Magnetic (MAG) | External Alley Light (A) | External LED Worklamps (X)

Lightbar Length - 2ft/610mm - 2 x LED Heads



LB242WA | LB242WA/MAG

Lightbar Length - 2.5ft/762mm - 2 x LED Heads

LB302WA | LB302WA/H | LB302WA/S

Lightbar Length - 3ft/915mm - 2 x LED Heads

LB362WA | LB362WA/O | LB362WA/I | LB362WA/H

LB362WA/S | LB362WA/A | LB362WA/OA | LBH362WA/SH

Lightbar Length - 4ft/1220mm - 2 x LED Heads

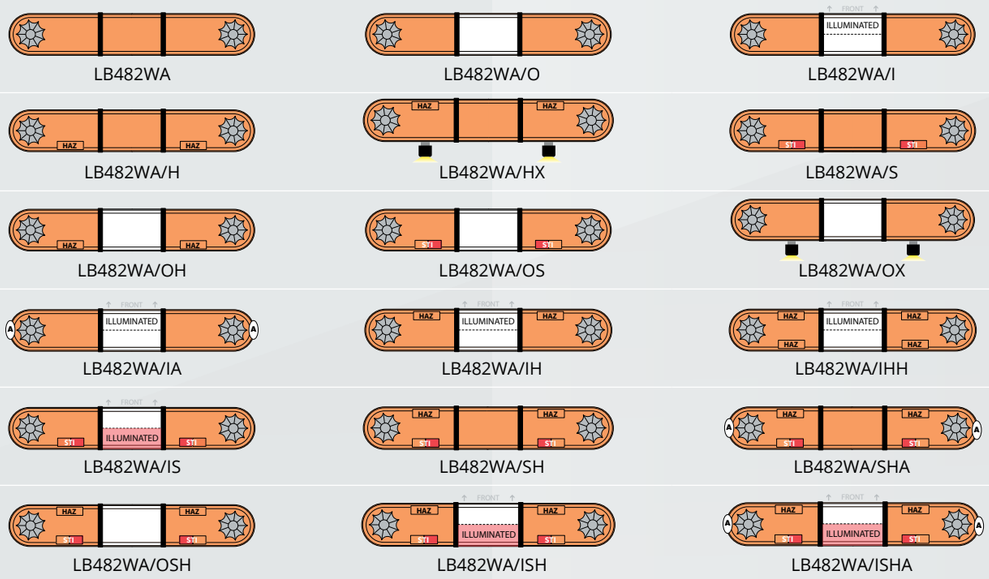

LB482WA | LB482WA/O | LB482WA/I

LB482WA/H | LB482WA/HX | LB482WA/S

LB482WA/OH | LB482WA/OS | LB482WA/OX

LB482WA/IA | LB482WA/IH | LB482WA/IHH

LB482WA/IS | LB482WA/SH | LB482WA/SHA

LB482WA/OSH | LB482WA/ISH | LB482WA/ISHA

Lightbar Length - 4ft/1220mm - 4 x LED Heads



LB484WA | LB484WA/O | LB484WA/I

Lightbar drawings for illustration purposes only.

CLASSIC TITAN MODEL GUIDE WHITE LEDs / AMBER LENS

CLASSIC TITAN LED LIGHTBAR RANGE

Reflector Module | Centre Illumination (I) | Opaque White Centre (O) | Stop, Tail, Indicator Light (S) | Hazard Light (H) | Magnetic (MAG) | External Alley Light (A) | External LED Worklamps (X)

Lightbar Length - 5ft/1524mm - 2 x LED Heads

LB602WA | LB602WAO | LB602WA/I

LB602WA/H | LB602WA/S | LB602WA/SH

LB602WA/OH | LB602WA/OS | LB602WA/OSH

LB602WA/IH | LB602WA/IS | LB602WA/ISH

Lightbar Length - 5ft/1524mm - 4 x LED Heads

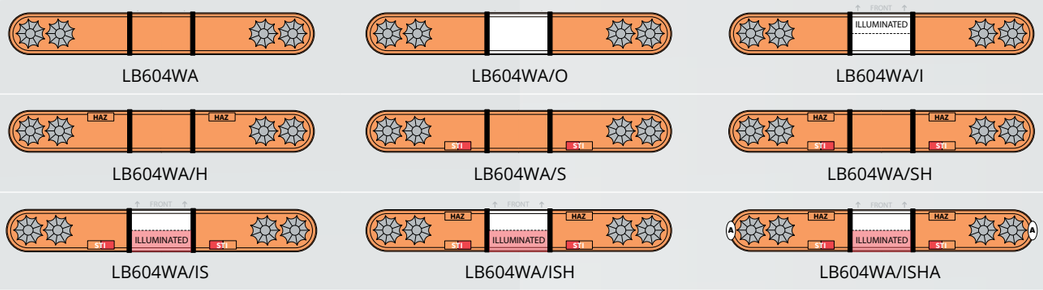

LB604WA | LB604WA/O | LB604WA/I

LB604WA/H | LB604WA/S | LB604WA/SH

LB604WA/IS | LB604WA/ISH | LB604WA/ISHA

Lightbar Length - 6ft/1828mm - 4 x LED Heads

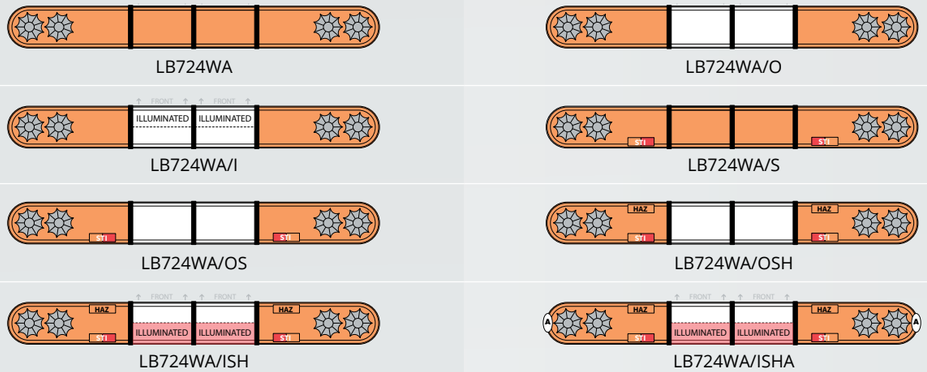

LB724WA | LB724WA/O

LB724WA/I | LB724WA/S

LB724WA/OS | LB724WA/OSH

LB724WA/ISH | LB724WA/ISHA

Lightbar drawings for illustration purposes only.

HURRICANE TITAN LED LIGHTBAR RANGE (6 LED SERIES)

HURRICANE TITAN LED LIGHTBAR RANGE

CUSTOMISATION
Every **Hurricane TITAN** LED lightbar is designed by our in-house engineers. Choose from six standard lengths and add further optional extras to suit your exact requirements.

LEAD TIMES
The **Hurricane TITAN** LED lightbar is manufactured at our UK production facility which means quicker responses, faster production times and no long delivery lead-times.

QUALITY CONTROL
Our fully trained and dedicated production team ensure every **Hurricane TITAN** is manufactured to the highest standards and 100% checked prior to despatch giving you full confidence.

Selectable CAP168 Flash Pattern

Add additional 3 LED or 6 LED modules

Tough amber, blue, clear and white polycarbonate lenses

Front facing LED illuminated centre section with optional sign writing (rear facing illumination when ordered with stop, tail, indicator light)

Stop, tail, indicator lights, hazard lights and external LED work lamps all available

Conformal coated modules manufactured with 3W LEDs

Extruded aluminium base

Adjustable heavy duty rubber mounting feet

KEY POINTS

R65 APPROVED · R10 APPROVED · 5 YEAR WARRANTY · MADE IN THE UK

POSSIBLE LENS / LED COLOUR COMBINATIONS

- Amber LEDs Clear Lens
- White LEDs Amber Lens
- Blue LEDs Clear Lens
- Blue LEDs Blue Lens
- Green LEDs Clear Lens
- Red LEDs Clear Lens

MAIN FEATURES

- Multi-voltage (10-30V)
- 2ft/600mm, 2.5ft/762mm, 3ft/915mm, 4ft/1220mm, 5ft/1524mm & 6ft/1828mm lengths available
- Four R65 approved flash patterns (single, double, triple, quad flash)
- Three selectable operating modes - simultaneous, left/right and front/back
- Airport flash mode available
- Amber or clear polycarbonate lenses
- Extruded aluminium base
- Fully encapsulated electronic control module
- Amber, clear or white centre sections available
- 4-bolt mounting fix / high rise feet option
- Extreme temperature reliability -30° to +50°
- 2ft Magnetic models available (40mph max. speed)
- 2.5 metre multi-core cable

ECE R65 CLASS I APPROVED

Blue LEDs with Blue Lens & Clear Lens Options

Components	Current Consumption @ 12V	Current Consumption @ 24V
3 LED Module (x1)	0.4A	0.2A
6 LED Module (x1)	0.9A	0.4A
Centre Illumination (x1)	0.4A	0.2A
Alley Light (x1)	0.3A	0.2A
Hazard Light (x1)	0.3A	0.2A
Stop, Tail, Indicator (x1)	0.6A	0.3A
LED Worklamp (x1)	1.0A	0.5A

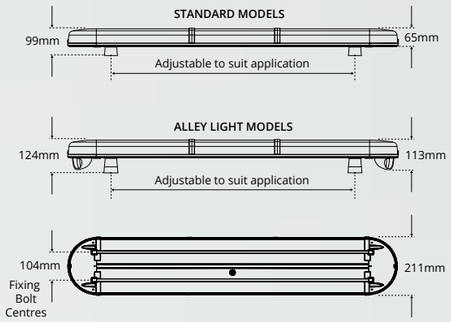

Model shown: LBH604H8AC/IS

CUSTOMISE YOUR HURRICANE TITAN

LED Stop, Tail, Indicator Light

External LED Alley Lights

Amber Lens & Blue Lenses Available

New Progressive Style Indicator

100mm & 150mm 'Z' Shaped Brackets

Opaque/Illuminated Centre & Signage

External LED Work Lamps

Extra 3 LED & 6 LED Modules

HURRICANE TITAN LED LIGHTBAR RANGE

HURRICANE TITAN MODEL GUIDE
6 LED SERIES
AMBER LEDs / CLEAR LENS

Additional 6 LED Amber Modules | Additional 3 LED Amber Modules | Centre Illumination (I) | Opaque White Centre (O) | Stop, Tail, Indicator Light (S) | Magnetic (MAG) | External LED Worklamps (X)

Lightbar Length - 2ft/610mm



LBH244AC | LBH244AC/MAG | LBH244H2AC | LBH244H4AC | LBH244H4AC/MAG

Lightbar Length - 2.5ft/762mm

LBH304AC | LBH304AC/X | LBH304H2AC | LBH304H4AC | LBH308AC

Lightbar Length - 3ft/915mm

LBH364AC | LBH364AC/O | LBH364AC/I | LBH364AC/S

LBH364H4AC | LBH364H4AC/O | LBH364H4AC/I | LBH364H4AC/X

LBH366AC | LBH366AC/S | LBH368AC | LBH368H4AC

Lightbar Length - 4ft/1220mm

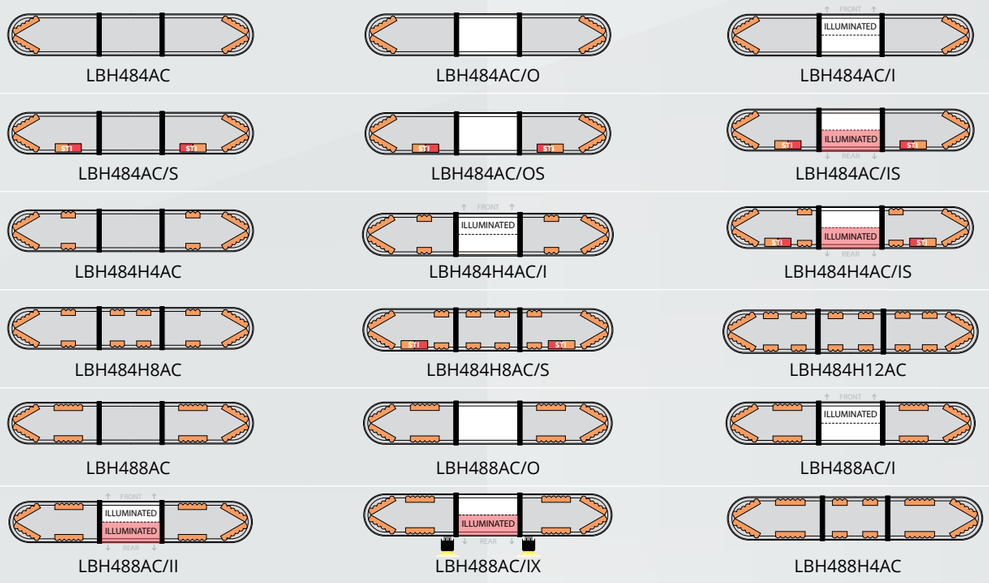

LBH484AC | LBH484AC/O | LBH484AC/I

LBH484AC/S | LBH484AC/OS | LBH484AC/IS

LBH484H4AC | LBH484H4AC/I | LBH484H4AC/IS

LBH484H8AC | LBH484H8AC/S | LBH484H12AC

LBH488AC | LBH488AC/O | LBH488AC/I

LBH488AC/II | LBH488AC/IX | LBH488H4AC

Lightbar drawings for illustration purposes only.

HURRICANE TITAN LED LIGHTBAR RANGE

HURRICANE TITAN MODEL GUIDE
6 LED SERIES
AMBER LEDs / CLEAR LENS

Additional 6 LED Amber Modules | Additional 3 LED Amber Modules | Centre Illumination (I) | Opaque White Centre (O) | Stop, Tail, Indicator Light (S) | Magnetic (MAG) | External LED Worklamps (X)

Lightbar Length - 5ft/1524mm

LBH604AC | LBH604AC/O | LBH604AC/I

LBH604AC/S | LBH604AC/OS | LBH604AC/IS

LBH604H4AC | LBH604H4AC/O | LBH604H4AC/I

LBH604H4AC/S | LBH604H4AC/OS | LBH604H4AC/IS

LBH608AC | LBH608AC/O | LBH608AC/I

LBH608AC/S | LBH608AC/OS | LBH608AC/IS

LBH608H4AC | LBH608H4AC/I | LBH608H6AC/S

Lightbar Length - 6ft (1828mm)

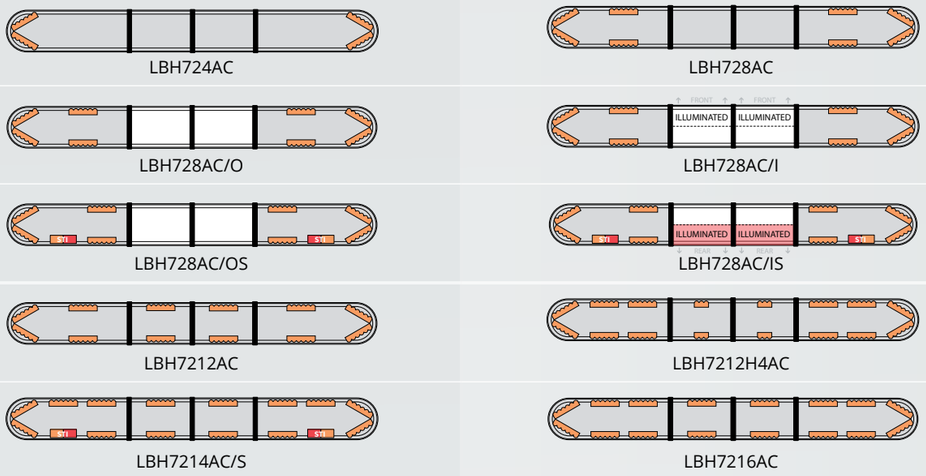

LBH724AC | LBH728AC

LBH728AC/O | LBH728AC/I

LBH728AC/OS | LBH728AC/IS

LBH7212AC | LBH7212H4AC

LBH7214AC/S | LBH7216AC

Lightbar drawings for illustration purposes only.

HURRICANE TITAN MODEL GUIDE
6 LED SERIES
WHITE LEDs / AMBER LENS

Additional 6 LED White Modules	Additional 3 LED White Modules	Centre Illumination (I)	Opaque White Centre (O)	Stop, Tail, Indicator Light (S)	Magnetic (MAG)	External LED Worklamps (X)

Lightbar Length - 2ft/610mm



LBH244WA | LBH244WA/MAG | LBH244H2WA | LBH244H4WA | LBH244H4WA/MAG

Lightbar Length - 2.5ft/762mm



LBH304WA | LBH304WA/X | LBH304H2WA | LBH304H4WA | LBH308WA

Lightbar Length - 3ft/915mm

LBH364WA | LBH364WA/O | LBH364WA/I | LBH364WA/S

LBH364H4WA | LBH364H4WA/O | LBH364H4WA/I | LBH364H4WA/X

LBH366WA | LBH366WA/S | LBH368WA | LBH368H4WA

Lightbar Length - 4ft/1220mm



LBH484WA | LBH484WA/O | LBH484WA/I

LBH484WA/S | LBH484WA/OS | LBH484WA/IS

LBH484H4WA | LBH484H4WA/I | LBH484H4WA/IS

LBH484H8WA | LBH484H8WA/S | LBH484H12WA

LBH488WA | LBH488WA/O | LBH488WA/I

LBH488WA/II | LBH488WA/IX | LBH488H4WA

Lightbar drawings for illustration purposes only.

HURRICANE TITAN MODEL GUIDE
6 LED SERIES
WHITE LEDs / AMBER LENS

Additional 6 LED White Modules	Additional 3 LED White Modules	Centre Illumination (I)	Opaque White Centre (O)	Stop, Tail, Indicator Light (S)	Magnetic (MAG)	External LED Worklamps (X)

Lightbar Length - 5ft/1524mm

LBH604WA | LBH604WA/O | LBH604WA/I

LBH604WA/S | LBH604WA/OS | LBH604WA/IS

LBH604H4WA | LBH604H4WA/O | LBH604H4WA/I

LBH604H4WA/S | LBH604H4WA/OS | LBH604H4WA/IS

LBH608WA | LBH608WA/O | LBH608WA/I

LBH608WA/S | LBH608WA/OS | LBH608WA/IS



LBH608H4WA | LBH608H4WA/I | LBH608H6WA/S

Lightbar Length - 6ft (1828mm)



LBH724WA | LBH728WA



LBH728WA/O | LBH728WA/I



LBH728WA/OS | LBH728WA/IS

LBH7212WA | LBH7212H4WA

LBH7214WA/S | LBH7216WA

Lightbar drawings for illustration purposes only.

HURRICANE TITAN LED LIGHTBAR RANGE

HURRICANE TITAN LED LIGHTBAR RANGE (3 LED SERIES)

CUSTOMISATION
Every **Hurricane TITAN** LED lightbar is designed by our in-house engineers. Choose from six standard lengths and add further optional extras to suit your exact requirements.

LEAD TIMES
The **Hurricane TITAN** LED lightbar is manufactured at our UK production facility which means quicker responses, faster production times and no long delivery lead-times.

QUALITY CONTROL
Our fully trained and dedicated production team ensure every **Hurricane TITAN** is manufactured to the highest standards and 100% checked prior to despatch giving you full confidence.

Selectable CAP168 Flash Pattern

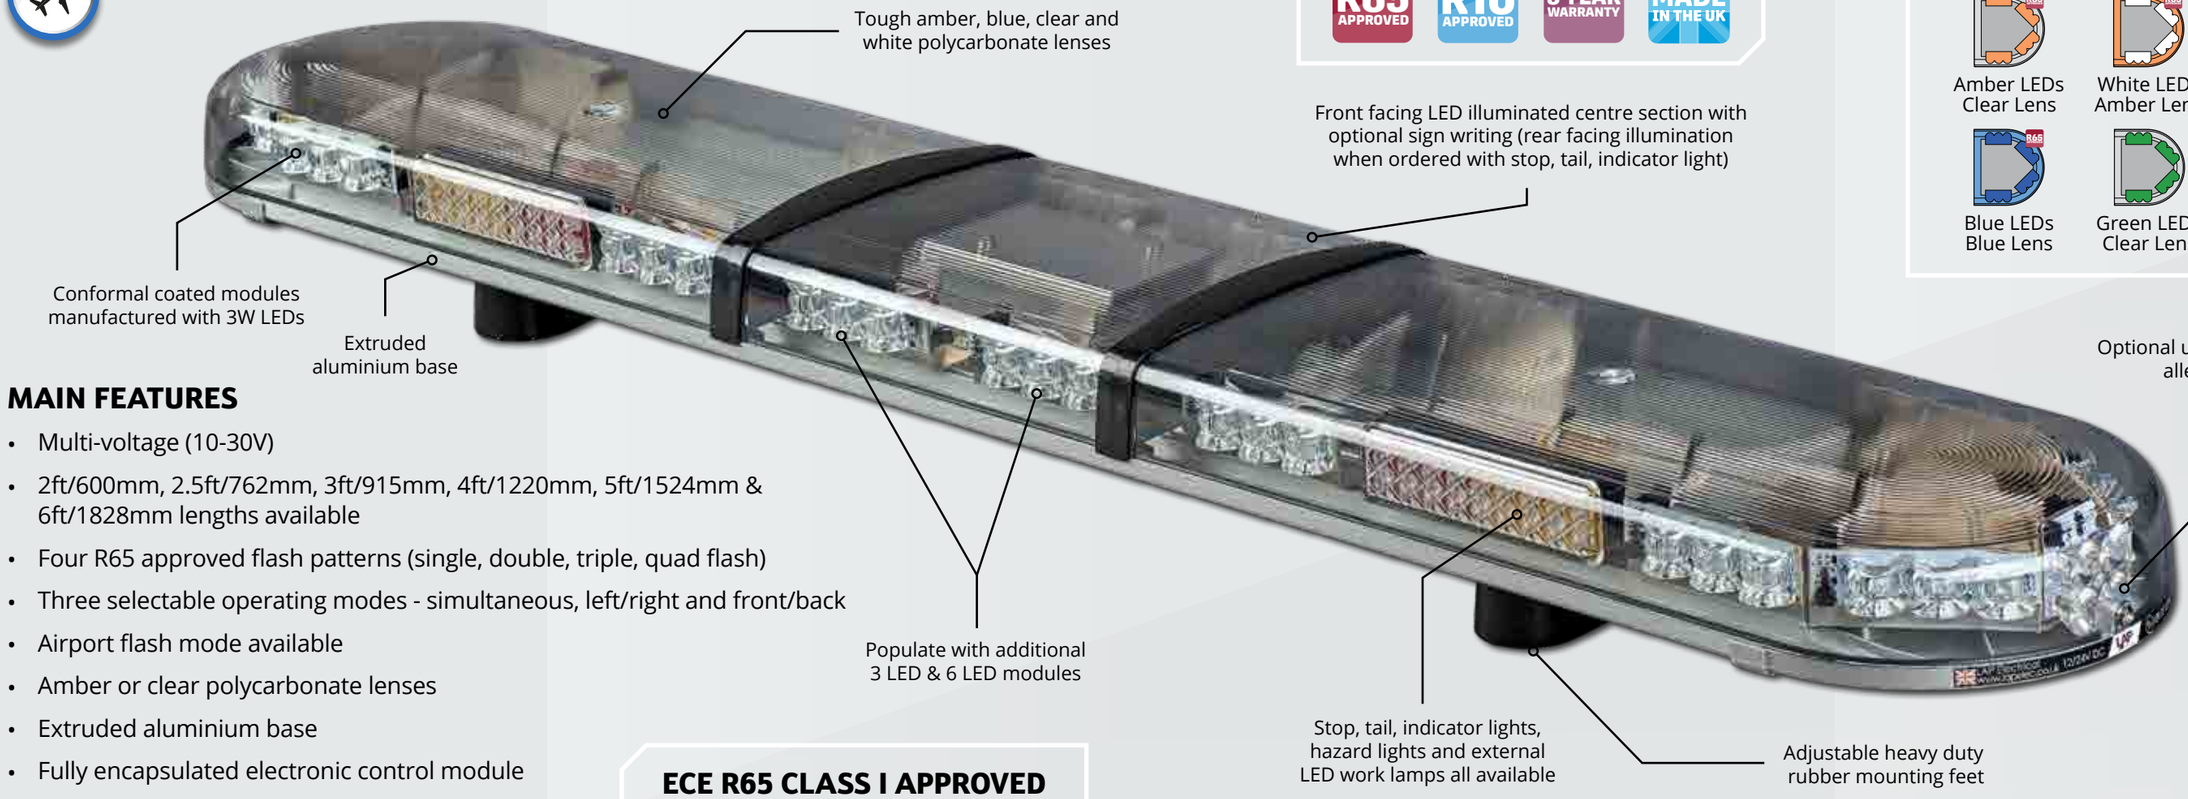

KEY POINTS

R65 APPROVED · R10 APPROVED · 5 YEAR WARRANTY · MADE IN THE UK

POSSIBLE LENS / LED COLOUR COMBINATIONS

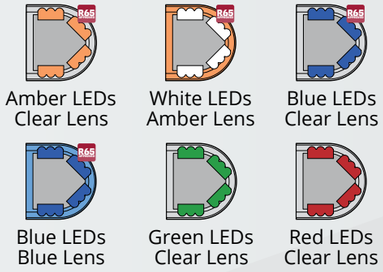

MAIN FEATURES

- Multi-voltage (10-30V)
- 2ft/600mm, 2.5ft/762mm, 3ft/915mm, 4ft/1220mm, 5ft/1524mm & 6ft/1828mm lengths available
- Four R65 approved flash patterns (single, double, triple, quad flash)
- Three selectable operating modes - simultaneous, left/right and front/back
- Airport flash mode available
- Amber or clear polycarbonate lenses
- Extruded aluminium base
- Fully encapsulated electronic control module
- Amber, clear or white centre sections available
- 4-bolt mounting fix / high rise feet option
- Extreme temperature reliability -30° to +50°
- 2ft Magnetic models available (40mph max. speed)
- 2.5 metre multi-core cable

Components	Current Consumption @ 12V	Current Consumption @ 24V
3 LED Module (x1)	0.4A	0.2A
6 LED Module (x1)	0.9A	0.4A
Centre Illumination (x1)	0.4A	0.2A
Alley Light (x1)	0.3A	0.2A
Hazard Light (x1)	0.3A	0.2A
Stop, Tail, Indicator (x1)	0.6A	0.3A
LED Worklamp (x1)	1.0A	0.5A

ECE R65 CLASS I APPROVED

Blue LEDs with Blue Lens & Clear Lens Options

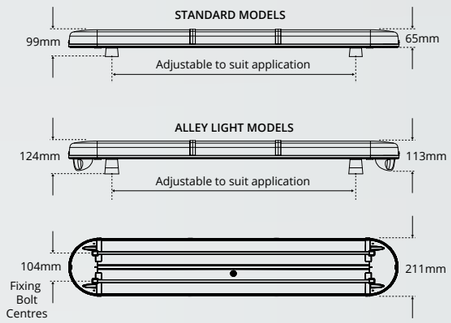

Model shown: LBH48H16AC/SZ

CUSTOMISE YOUR HURRICANE TITAN

LED Stop, Tail, Indicator Light


Internal LED Alley Lights

Amber Lens & Blue Lenses Available

New Progressive Style Indicator

100mm & 150mm 'Z' Shaped Brackets

Opaque/Illuminated Centre & Signage

External LED Work Lamps

Extra 3 LED & 6 LED Modules

HURRICANE TITAN MODEL GUIDE
3 LED SERIES
AMBER LEDs / CLEAR LENS

HURRICANE TITAN LED LIGHTBAR RANGE

Additional 3 LED Amber Modules	Additional 6 LED Amber Modules	Centre Illumination (I)	Opaque White Centre (O)	Stop, Tail, Indicator Light (S)	Magnetic (MAG)	Internal Alley Light (Z)	External LED Worklamps (X)

Lightbar Length - 2ft/610mm


LBH24H12AC


LBH24H8AC


LBH24H12AC/Z


LBH24H8AC/Z


LBH24H8AC/MAG

Lightbar Length - 2.5ft/762mm


LBH30H12AC


LBH30H8AC


LBH30H10AC


LBH30H12AC/Z


LBH30H8AC/Z

Lightbar Length - 3ft/915mm


LBH36H16AC


LBH36H12AC

LBH36H8AC

LBH36H8AC/O


LBH36H10AC


LBH36H10AC/Z


LBH36H12AC/Z



LBH36H8AC/S

Lightbar Length - 4ft/1220mm


LBH48H16AC

LBH48H12AC

LBH48H8AC

LBH48H16AC/O

LBH48H12AC/O

LBH48H8AC/O

D-LBH48H14AC

D-LBH48H12AC

D-LBH48H10AC


LBH48H16AC/Z

LBH48H12AC/Z

LBH48H8AC/Z



LBH48H16AC/S

LBH48H12AC/S

LBH48H8AC/S

LBH48H16AC/I

LBH48H12AC/I

LBH48H8AC/I

LBH48H12AC/IS

LBH48H10AC/IS

LBH48H8AC/IS

Lightbar drawings for illustration purposes only.

HURRICANE TITAN MODEL GUIDE
3 LED SERIES
AMBER LEDs / CLEAR LENS

HURRICANE TITAN LED LIGHTBAR RANGE

Additional 3 LED Amber Modules	Additional 6 LED Amber Modules	Centre Illumination (I)	Opaque White Centre (O)	Stop, Tail, Indicator Light (S)	Magnetic (MAG)	Internal Alley Light (Z)	External LED Worklamps (X)

Lightbar Length - 4ft/1220mm

LBH48H12AC/ISZ



LBH48H8AC/ISZ

LBH48H8AC/SZ


LBH48H12AC/X

LBH48H8AC/OX


LBH48H8AC/X

Lightbar Length - 5ft/1524mm

LBH60H16AC

LBH60H12AC

LBH60H16AC/O

LBH60H12AC/O

LBH60H16AC/I

LBH60H12AC/I

D-LBH60H14AC

D-LBH60H12AC/O

D-LBH60H10AC/O

LBH60H16AC/OZ

LBH60H12AC/Z

LBH60H8AC/Z



LBH60H16AC/S

LBH60H12AC/S

LBH60H8AC/S

LBH60H12AC/IS

LBH60H8AC/SZ


LBH60H16AC/X

Lightbar Length - 6ft (1828mm)


LBH72H16AC



LBH72H16AC/I



LBH72H16AC/S



LBH72H12AC/S



LBH72H16AC/SZ



LBH72H12AC/IS

Lightbar drawings for illustration purposes only.

HURRICANE TITAN LED LIGHTBAR RANGE

HURRICANE TITAN MODEL GUIDE
3 LED SERIES
WHITE LEDs / AMBER LENS

Additional 3 LED White Modules	Additional 6 LED White Modules	Centre Illumination (I)	Opaque White Centre (O)	Stop, Tail, Indicator Light (S)	Magnetic (MAG)	Internal Alley Light (Z)	External LED Worklamps (X)

Lightbar Length - 2ft/610mm


LBH24H12WA


LBH24H8WA


LBH24H12WA/Z


LBH24H8WA/Z


LBH24H8WA/MAG

Lightbar Length - 2.5ft/762mm


LBH30H12WA


LBH30H8WA


LBH30H10WA


LBH30H12WA/Z


LBH30H8WA/Z

Lightbar Length - 3ft/915mm


LBH36H16WA


LBH36H12WA

LBH36H8WA

LBH36H8WA/O

LBH36H10WA

LBH36H10WA/Z

LBH36H12WA/Z

LBH36H8WA/S

Lightbar Length - 4ft/1220mm


LBH48H16WA

LBH48H12WA

LBH48H8WA

LBH48H16WA/O

LBH48H12WA/O

LBH48H8WA/O


D-LBH48H14WA

D-LBH48H12WA

D-LBH48H10WA


LBH48H16WA/Z

LBH48H12WA/Z

LBH48H8WA/Z

LBH48H16WA/S

LBH48H12WA/S

LBH48H8WA/S

LBH48H16WA/I

LBH48H12WA/I

LBH48H8WA/I

LBH48H12WA/IS

LBH48H10WA/IS

LBH48H8WA/IS

Lightbar drawings for illustration purposes only.

HURRICANE TITAN LED LIGHTBAR RANGE

HURRICANE TITAN MODEL GUIDE
3 LED SERIES
WHITE LEDs / AMBER LENS

Additional 3 LED Amber Modules	Additional 6 LED Amber Modules	Centre Illumination (I)	Opaque White Centre (O)	Stop, Tail, Indicator Light (S)	Magnetic (MAG)	Internal Alley Light (Z)	External LED Worklamps (X)

Lightbar Length - 4ft/1220mm

LBH48H12WA/ISZ



LBH48H8WA/ISZ

LBH48H8WA/SZ

LBH48H12WA/X

LBH48H8WA/OX


LBH48H8WA/X

Lightbar Length - 5ft/1524mm

LBH60H16WA

LBH60H12WA

LBH60H16WA/O


LBH60H12WA/O

LBH60H16WA/I



LBH60H12WA/I

D-LBH60H14WA

D-LBH60H12WA/O

D-LBH60H10WA/O

LBH60H16WA/OZ

LBH60H12WA/Z

LBH60H8WA/Z


LBH60H16WA/S

LBH60H12WA/S

LBH60H8WA/S

LBH60H12WA/IS

LBH60H8WA/SZ

LBH60H16WA/X

Lightbar Length - 6ft (1828mm)


LBH72H16WA



LBH72H16WA/I


LBH72H16WA/S


LBH72H12WA/S


LBH72H16WA/SZ



LBH72H12WA/IS

Lightbar drawings for illustration purposes only.

TORNADO TITAN LED LIGHTBAR RANGE

CUSTOMISATION
Every **Tornado TITAN** LED lightbar is designed by our in-house engineers. Choose from six standard lengths and add further optional extras to suit your exact requirements.

LEAD TIMES
The **Tornado TITAN** LED lightbar is manufactured at our UK production facility which means quicker responses, faster production times and no long delivery lead-times.

QUALITY CONTROL
Our fully trained and dedicated production team ensure every **Tornado TITAN** is manufactured to the highest standards and 100% checked prior to despatch giving you full confidence.

Model shown: LBT482A/IH

KEY POINTS

R65 APPROVED · R10 APPROVED · 3 YEAR WARRANTY · MADE IN THE UK

MAIN FEATURES

- Multi-voltage (10-30V)
- 2ft/600mm, 2.5ft/762mm, 3ft/915mm, 4ft/1220mm, 5ft/1524mm & 6ft/1828mm lengths available
- ECE R65 approved double flash pattern
- Amber polycarbonate lenses
- Extruded aluminium base
- Amber or white centre sections available
- 4-bolt mounting fix / high rise feet option
- Extreme temperature reliability -30° to +50°
- 2ft magnetic model available (40mph max. speed)
- 2.5 metre multi-core cable

Components	Current Consumption @ 12V	Current Consumption @ 24V
R65 LED Module (x1)	2.0A	1.0A
Centre Illumination (x1)	0.4A	0.2A
Alley Light (x1)	0.3A	0.2A
Hazard Light (x1)	0.3A	0.2A
Stop, Tail, Indicator (x1)	0.6A	0.3A
LED Worklamp (x1)	1.0A	0.5A

CLBT162A
400mm compact lightbar also available (see page 59).

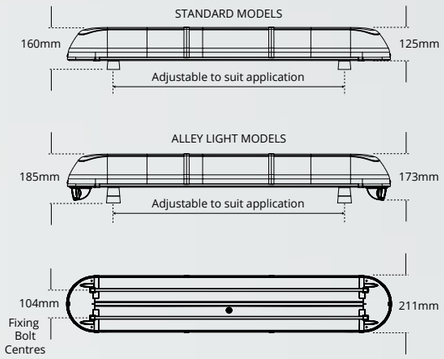

CUSTOMISE YOUR TORNADO TITAN

LED Stop, Tail, Indicator Light

External LED Alley Lights

Two or four LED head options


Front & Rear Hazard Lights

100mm & 150mm 'Z' Shaped Brackets

Opaque/Illuminated Centre & Signage

External LED Work Lamps

Lengths from 2ft to 6ft

LIGHTBARS

TORNADO TITAN LED LIGHTBAR RANGE

TORNADO TITAN MODEL GUIDE
WHITE LEDs / AMBER LENS

45 LED Module	Centre Illumination (I)	Opaque White Centre (O)	Stop, Tail, Indicator Light (S)	Hazard Light (H)	Magnetic (MAG)	Alley Light (A)	External LED Worklamps (X)

Lightbar Length - 2ft/610mm


LBT242A

LBT242A/MAG

Lightbar Length - 2.5ft/762mm


LBT302A

LBT302A/I


LBT304A

Lightbar Length - 3ft/915mm

LBT362A

LBT362A/I

LBT362A/S

Lightbar Length - 4ft/1220mm

LBT482A

LBT482A/I

LBT482A/IS

LBT482A/IH

LBT484A/I

LBT484A/IX

Lightbar Length - 5ft/1524mm

LBT602A

LBT604A

LBT604A/I

LBT604A/SA

LBT604A/IHH

LBT604A/IS

Lightbar Length - 6ft/1828mm


LBT722A


LBT724A



LBT724A/I



LBT724A/S



LBT724A/IHH



LBT724A/IS

Lightbar drawings for illustration purposes only.

LIGHTBARS

JUPITER LED LIGHTBAR RANGE

JUPITER LED LIGHTBAR RANGE

MAIN FEATURES

- Multi-voltage (10-30V)
- IP67 rated ingress protection
- Clear polycarbonate lens
- 10 flash patterns
- Single flash pattern meets R65 approval
- Manufactured with 0.5W amber LEDs
- 60mph rated on magnetic LAP1556AC/MAG
- Available in 3 different lengths

LAP1556AC/SP - 388mm length

KEY POINTS

R65 APPROVED | R10 APPROVED | 3 YEAR WARRANTY | IP67 INGRESS PROTECTION

LAP1556AC/SP Dimensions

LAP45164AC - 1148mm length

Part Number	LED Colour	Dimensions (mm) (L) x (W) x (D)	Number of LEDs	LED Rating	Mounting	Current @ 12V / 24V
LAP1556AC/SP	Amber	388 x 220 x 70	56	0.5W	Single Point	2.3A / 1.2A
LAP37132AC	Amber	921 x 305 x 121*	132	0.5W	Four Point	5.5A / 2.8A
LAP45164AC	Amber	1148 x 305 x 121*	164	0.5W	Four Point	6.8A / 3.4A

**Including rubber fixing feet and brackets*

LIGHTBARS

COMET LED LIGHTBAR RANGE

Only 122mm in width

MAIN FEATURES

- ECE R65 approved (single flash)
- EMC (ECE R10) approved
- CISPR25 Class 3 approved
- Ultra slimline design - only 122mm in width
- 10 flash patterns in total
- Manufactured with a combination of 1W & 0.5W amber LEDs
- Lightweight design to help reduce fuel consumption and CO_2 emissions
- Four different lengths available

LAP-COMET637
637mm length

KEY POINTS

R65 APPROVED | R10 APPROVED | 3 YEAR WARRANTY | IP67 INGRESS PROTECTION

LAP-COMET955
955mm length

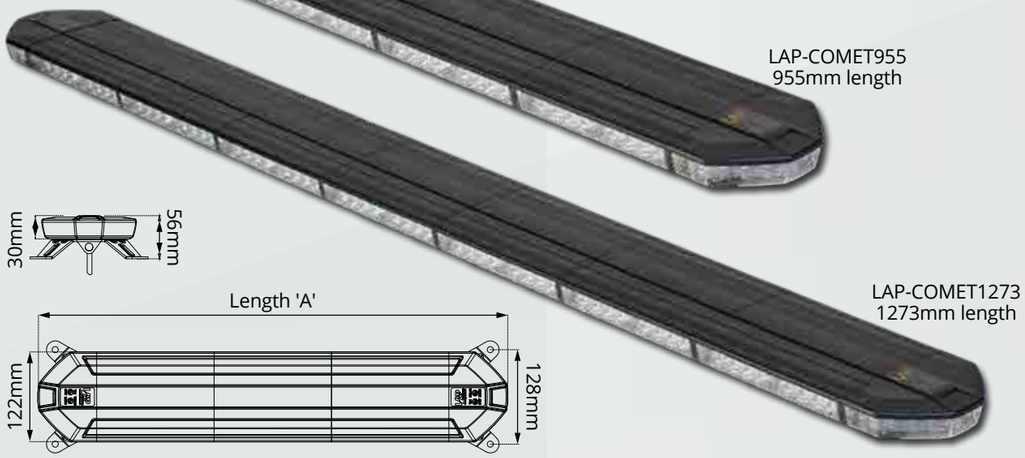

LAP-COMET1273
1273mm length

Part Number	LED Colour	Length (A)	Number of LEDs	Weight*	Mounting	Current @ 12V / 24V
LAP-COMET637	Amber	637mm	64	1.3KG	Four Point	2.6A / 1.3A
LAP-COMET955	Amber	955mm	96	1.7KG	Four Point	2.8A / 1.4A
LAP-COMET1273	Amber	1273mm	128	2.4KG	Four Point	3.0A / 1.5A
LAP-COMET1432	Amber	1432mm	144	3.2KG	Four Point	3.2A / 1.6A

Including brackets and fixings

ECLIPSE LED LIGHTBAR RANGE

MAIN FEATURES

- Multi-voltage (10-30V)
- 10 flash patterns
- Single flash pattern meets R65 approval
- Clear polycarbonate lens
- Four point fixing
- Manufactured with 0.5W amber LEDs
- Supplied with rubber fixing feet and brackets
- Available in 4 different lengths

LAP2156AC - 540mm length

LAP2156AC - 540mm length

KEY POINTS

R65 APPROVED | R10 APPROVED | 3 YEAR WARRANTY | IP67 INGRESS PROTECTION

LAP3488AC - 860mm length

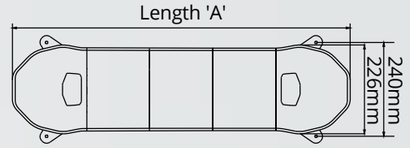

LAP47120AC - 1181mm length

LAP59152AC - 1501mm length

Part Number	LED Colour	Length (A)	Mounted Height	Number of LEDs	LED Rating	Mounting	Current @ 12V / 24V
LAP2156AC	Amber	540mm	90mm	56	0.5W	Four Point	2.3A / 1.2A
LAP3488AC	Amber	860mm	90mm	88	0.5W	Four Point	3.7A / 1.8A
LAP47120AC	Amber	1181mm	90mm	120	0.5W	Four Point	5.0A / 2.5A
LAP59152AC	Amber	1501mm	90mm	152	0.5W	Four Point	6.3A / 3.2A

LAP1648 MINI LED LIGHTBAR RANGE

MAIN FEATURES

- Multi-voltage (10-30V)
- Clear polycarbonate lens
- Available in magnetic and four point fixings
- 70mph rated on magnetic version
- Single flash meets R65 approval
- Dimensions: 398 (L) x 216 (W) x 47mm (H)
- Manufactured with 48 x 0.5W amber LEDs

Part Number	Lens Colour	Mounting	Current @ 12V / 24V
LAP1648AC/MAG	Clear	Magnetic	2.0A / 1.0A
LAP1648AC/QB	Clear	Four Point	2.0A / 1.0A

KEY POINTS

R65 APPROVED · R10 APPROVED · 3 YEAR WARRANTY · IP67 INGRESS PROTECTION

LAP1220 MINI LED LIGHTBAR RANGE

MAIN FEATURES

- Multi-voltage (10-30V)
- Amber and clear polycarbonate lens
- Available in magnetic and single point fixings
- 40mph rated on magnetic version
- Single flash meets R65 approval
- Dimensions: 297 (L) x 175 (W) x 53mm (H)
- Manufactured with 20 x 3W LEDs

Part Number	Lens Colour	Mounting	Current @ 12V / 24V
LAP1220R65MAG	Amber	Magnetic	1.4A / 0.7A
LAP1220R65SP	Amber	Single Point	1.4A /0.7A
LAP1220CR65/MAG	Clear	Magnetic	1.4A / 0.7A
LAP1220CR65/SP	Clear	Single Point	1.4A / 0.7A

KEY POINTS

R65 APPROVED · R10 APPROVED · 2 YEAR WARRANTY · IP65 INGRESS PROTECTION

LAP1272 MINI LED LIGHTBAR RANGE

MAIN FEATURES

- Multi-voltage (10-30V)
- Clear polycarbonate lens
- Available in magnetic and single point fixings
- 40mph rated on magnetic version
- Single flash meets R65 approval
- Dimensions: 310 (L) x 159 (W) x 75mm (H)
- Manufactured with 72 x 0.5W amber LEDs

Part Number	Lens Colour	Mounting	Current @ 12V / 24V
LAP1272AC/MAG	Clear	Magnetic	3.0A / 1.5A
LAP1272AC/SP	Clear	Single Point	3.0A / 1.5A

KEY POINTS

R65 APPROVED · R10 APPROVED · 2 YEAR WARRANTY · IP65 INGRESS PROTECTION

LAP1224 MINI LED LIGHTBAR RANGE

MAIN FEATURES

- Multi-voltage (10-30V)
- Clear polycarbonate lens
- Available in magnetic and single point fixings
- 8 flash patterns
- 40mph rated on magnetic version
- Dimensions: 310 (L) x 160 (W) x 60mm (H)
- Manufactured with 24 x 1W amber LEDs

Part Number	Lens Colour	Mounting	Current @ 12V / 24V
LAP1224MAG	Clear	Magnetic	2.0A / 1.0A
LAP1224SP	Clear	Single Point	2.0A / 1.0A

KEY POINTS

LED · R10 APPROVED · 1 YEAR WARRANTY · IP56 INGRESS PROTECTION

ROTATING TITAN LIGHTBAR RANGE

CUSTOMISATION
Every **Rotating TITAN** lightbar is designed by our in-house engineers. Choose from six standard lengths and add further optional extras to suit your exact requirements.

LEAD TIMES
The **Rotating TITAN** lightbar is manufactured at our UK production facility which means quicker responses, faster production times and no long delivery lead-times.

QUALITY CONTROL
Our fully trained and dedicated production team ensure every **Rotating TITAN** is manufactured to the highest standards and 100% checked prior to despatch giving you full confidence.

KEY POINTS

R65 APPROVED · R10 APPROVED · 1 YEAR WARRANTY · MADE IN THE UK

Model shown: LBR482A/IH

MAIN FEATURES

- Dual Voltage (12/24V)
- 2ft/600mm, 2.5ft/762mm, 3ft/915mm, 4ft/1220mm, 5ft/1524mm & 6ft/1828mm lengths available
- Nominal flash rate: 180 per minute
- Amber polycarbonate lens
- Extruded aluminium base
- Reverse polarity protection
- Amber or white centre sections available
- 4-bolt mounting fix / high rise feet option
- Extreme temperature reliability -30° to +50°
- 2.5 metre multi-core cable
- Supplied with 12V halogen bulbs

Components	Current Consumption @ 12V	Current Consumption @ 24V
R65 Rotating Module (x1)	4.6A	3.0A
Centre Illumination (x1)	1.8A	0.9A
LED Alley Light (x1)	0.3A	0.2A
LED Hazard Light (x1)	0.3A	0.2A
LED Stop, Tail, Indicator (x1)	0.6A	0.3A
LED Worklamp (x1)	1.0A	0.5A

CLB55SA & CLB55TA
400mm compact rotating lightbar also available (see page 59).

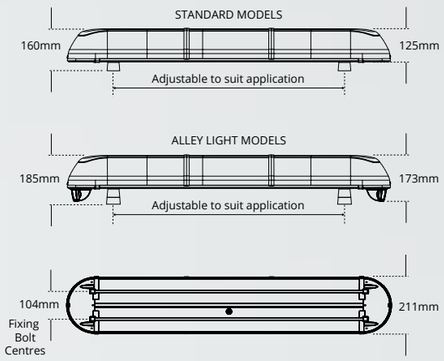

CUSTOMISE YOUR ROTATING TITAN

LED Stop, Tail, Indicator Light

External LED Alley Lights

Two or four LED head options


Front & Rear Hazard Lights

100mm & 150mm 'Z' Shaped Brackets

Opaque/Illuminated Centre & Signage

External LED Work Lamps

Lengths from 2ft to 6ft

LIGHTBARS

ROTATING

TITAN

LIGHTBAR RANGE

ROTATING TITAN MODEL GUIDE AMBER LENS

Rotating Module & Mirror	Centre Illumination (I)	Opaque White Centre (O)	Stop, Tail, Indicator Light (S)	Hazard Light (H)	Alley Light (A)	External LED Worklamps (X)

Lightbar Length - 2ft/610mm



LBR242A

Lightbar Length - 2.5ft/762mm



LBR302A

LBR302A/I

Lightbar Length - 3ft (915mm)



LBR362A

LBR362A/I

LBR362A/S

Lightbar Length - 4ft (1220mm)

LBR482A

LBR482A/I

LBR482A/OS

LBR482A/IH

LBR484A

LBR484A/I

Lightbar Length - 5ft (1524mm)

LBR602A

LBR604A

LBR604A/I

LBR604A/S

LBR604A/IHH

LBR604A/IS

Lightbar Length - 6ft (1828mm)



LBR722A



LBR724A

LBR724A/I



LBR724A/AX



LBR724A/IHH

LBR724A/IS

Lightbar drawings for illustration purposes only.

CLBT162 MINI LED LIGHTBAR RANGE

MAIN FEATURES

- Multi-voltage (10-30V)
- Amber polycarbonate lens
- Available in single point and twin point fixings
- Double flash only
- 120 flashes per minute
- Dimensions: 400 (L) x 180 (W) x 134mm (H)
- Manufactured with 2 x 45 LED heads

Part Number	Lens Colour	Mounting	Current @ 12V / 24V
CLBT162A/SP	Amber	Single Point	4.0A / 2.0A
CLBT162A/TB	Amber	Twin Point	4.0A / 2.0A

KEY POINTS

R65 APPROVED · R10 APPROVED · 3 YEAR WARRANTY · IP56 INGRESS PROTECTION

CLB MINI HALOGEN LIGHTBAR RANGE

MAIN FEATURES

- Dual Voltage (12/24V)
- Supplied with 12V halogen bulbs
- -30°C to +50°C extreme temperature reliability
- Three fixings available including single-point
- 180 flashes per minute
- Dimensions: 400 (L) x 180 (W) x 134mm (H)
- 40mph rated on magnetic version

Part Number	Lens Colour	Mounting	Current @ 12V / 24V
CLB55MA	Amber	Magnetic	9.2A / 6.0A
CLB55SA	Amber	Single Point	9.2A / 6.0A
CLB55TA	Amber	Twin Point	9.2A / 6.0A

KEY POINTS

R65 APPROVED · R10 APPROVED · 1 YEAR WARRANTY · IP56 INGRESS PROTECTION