

The background is a solid blue color. A white geometric shape, resembling a stylized 'L' or a corner bracket, is positioned in the upper left and lower right. In the center, there is a faint, semi-transparent image of a mechanical component, possibly a bearing or a pulley, with a central hub and outer rings. The text is overlaid on this central image.

REVERSING SAFETY

RCK REVERSING CAMERA KIT RANGE



RCK070 - MAIN FEATURES

- Multi-voltage (9-36V)
- 7" monitor, rear view camera & 15m cable
- Rear-view camera meets IP68 rating
- 18 Infrared LEDs for low light and night use
- 3 camera input capacity
- Integral monitor speaker and camera microphone

KEY POINTS



ACCESSORIES FOR RCK RANGE



63201103

Standard rear view camera as supplied with RCK070 kit, can be used as secondary or tertiary inputs and complete with adjustable visor.

Dimensions:
80 x 75 x 70mm



63201107

Adjustable camera, ideal for use as a secondary camera and can be positioned anywhere on vehicle.

Dimensions:
80 x 63 x 56mm



63201106

Rear centre camera for use when loading & unloading, reversing and while vehicle is stationary.

Dimensions:
135 x 210 x 77mm



63201108 (5m) 63201109 (10m) 63201763 (15m) 63201110 (20m)

5m, 10m, 15m & 20m extension cables, available for all vehicle sizes.



63201104 (left) 63201105 (right)

Left & right hand side cameras designed for safety when turning near pedestrians, cyclists and smaller vehicles.

Dimensions:
60 x 57 x 84mm



RCK Trailer Kit

Heavy duty and weatherproof connection to link trailer mounted camera to cab mounted monitor.

RCK RECORDABLE CAMERA KIT RANGE

RCK0704DVR

Supplied with 7" monitor, 4 cameras and 4 extension cables.



RCK0701DVR

Supplied with 7" monitor, 1 camera and 1 extension cable.



RCM070DVR

Use existing RCK camera accessories with the recordable RCM070DVR monitor

Play back, share and save high-quality video files for future use.

Record full screen or quad screen, simply insert an SD card to record exactly what is displayed on the monitor.

Approx Recording Capacity:
32GB - 20 Hours

Oldest recordings will automatically be overwritten once card capacity has been reached.



REVERSING SAFETY

REVERSING SAFETY

REVERSE ALARM RANGE




Wired Model

MAIN FEATURES

- CE and 'E' marked (EMC)
- Available in 87, 92, 97, 102 & 107dB sound levels
- Night-silent & multi-frequency models available
- Fully weatherproof / pressure washable
- Available with wire lead or stud connections
- Epoxy encapsulated housing
- -30°C to +50°C extreme temperature reliability



Stud Model

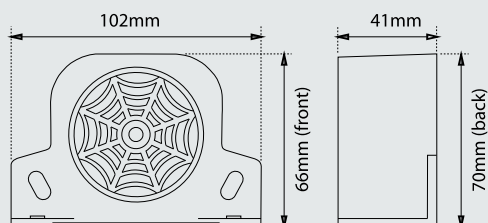

Multi-Frequency Model

Part Number	Fixing	Decibels	Voltage	Current @ 80Vdc	Night Silent	Multi-Frequency	Weight KG (Approx)	Warranty
RA087W	Wire	87dB	12-80Vdc	0.1A	-	-	0.30	1 Year
RA/MF87W	Wire	87dB	12/24V	0.1A	-	✓	0.32	2 Years
RA/MF92W	Wire	92dB	12/24V	0.2A	-	✓	0.32	2 Years
RA097W	Wire	97dB	12-80Vdc	0.2A	-	-	0.30	1 Year
RA097N	Wire	97dB	12-80Vdc	0.2A	✓	-	0.30	1 Year
RA102W	Wire	102dB	12-80Vdc	0.3A	-	-	0.30	1 Year
RA107W	Wire	107dB	12-80Vdc	0.4A	-	-	0.30	1 Year
RA087S	Stud	87dB	12-80Vdc	0.1A	-	-	0.32	1 Year
RA097S	Stud	97dB	12-80Vdc	0.2A	-	-	0.32	1 Year
RA102S	Stud	102dB	12-80Vdc	0.3A	-	-	0.32	1 Year
RA107S	Stud	107dB	12-80Vdc	0.4A	-	-	0.32	1 Year