

CUSTOMISATION
Every Rotating TITAN lightbar is designed by our in-house engineers. Choose from six standard lengths and add further optional extras to suit your exact requirements.

LEAD TIMES
The Rotating TITAN lightbar is manufactured at our UK production facility which means quicker responses, faster production times and no long delivery lead-times.

QUALITY CONTROL
Our fully trained and dedicated production team ensure every Rotating TITAN is manufactured to the highest standards and 100% checked prior to despatch giving you full confidence.

KEY POINTS




MAIN FEATURES

- Dual Voltage (12/24V)
- 2ft/600mm, 2.5ft/762mm, 3ft/915mm, 4ft/1220mm, 5ft/1524mm & 6ft/1828mm lengths available
- Nominal flash rate: 180 per minute
- Amber polycarbonate lens
- Extruded aluminium base
- Reverse polarity protection
- Amber or white centre sections available
- 4-bolt mounting fix / high rise feet option
- Extreme temperature reliability -30° to +50°
- 2.5 metre multi-core cable
- Supplied with 12V halogen bulbs




CLB55SA & CLB55TA
400mm compact rotating lightbar
also available (see page 59).

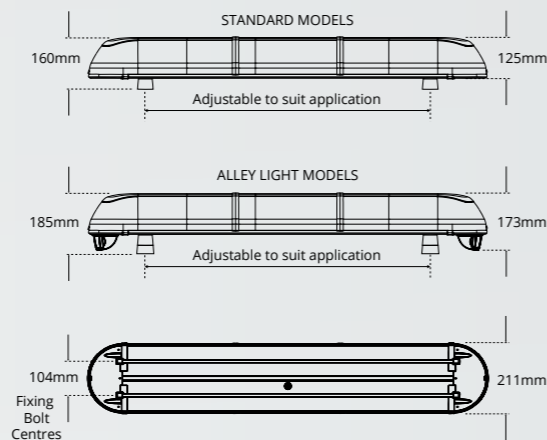

Components	Current Consumption @ 12V	Current Consumption @ 24V
R65 Rotating Module (x1)	4.6A	3.0A
Centre Illumination (x1)	1.8A	0.9A
LED Alley Light (x1)	0.3A	0.2A
LED Hazard Light (x1)	0.3A	0.2A
LED Stop, Tail, Indicator (x1)	0.6A	0.3A
LED Worklamp (x1)	1.0A	0.5A

Model shown: LBR482A/IH

CUSTOMISE YOUR ROTATING TITAN



LED Stop, Tail, Indicator Light



External LED Alley Lights



Two or four LED head options



Front & Rear Hazard Lights



100mm & 150mm Z Shaped Brackets



Opaque/Illuminated Centre & Signage



External LED Work Lamps



Lengths from 2ft to 6ft