

GLEED6 LED WARNING MODULE



MAIN FEATURES


- Multi-voltage (10-30V)
- 5 flash patterns (double flash R65 approval)
- Manufactured with 6 x 6W LEDs
- Link multiple units for synch / alternate flash
- Current consumption: 0.4A @ 12V, 0.2A @ 24V
- Dimensions: 128 (L) x 28 (W) x 17mm (H)
- Steady on function

Part Number	6W LEDs	Dimensions (L) x (W) x (H)	Current @ 12V / 24V
GLEED6A	6	128 x 28 x 17mm	0.4A / 0.2A

KEY POINTS



JLED12 LED WARNING MODULE RANGE

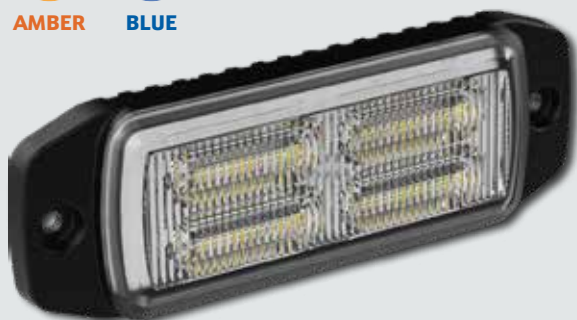

MAIN FEATURES

- Multi-voltage (10-30V)
- IP69K ingress protection
- Single flash meets R65 approval
- Manufactured with 12 x 3W LEDs
- Link multiple units for synch / alternate flash
- Dimensions: 108 (L) x 36 (W) x 12mm (H)
- Aluminium housing & polycarbonate lens

Part Number	LEDs	LED Colour	Current @ 12V / 24V
JLED12A	12 x 3W	Amber	0.3A / 0.2A
JLED12B	12 x 3W	Blue	0.3A / 0.2A

KEY POINTS

