

LED WORK LAMPS (LAP279 Range)

Our 27W LED Work Lamps feature the latest LED technology for bright light output with minimal power consumption. Available as round or square models, they are both lightweight and durable.



LAPS279



LAPR279

Main Features

- EMC approved
- 9 x 3W High intensity LEDs with wide angle optics for flood beam
- 27W / 1600 Lumen
- PMMA Lens with die cast aluminium housing
- IP67 Ingress Protection
- 12 month warranty

Specifications

- Operating temperature: -40 to +120°C
- Voltage: 12-30V
- Current draw: 2.1A (12V) - 1.1A (24V)
- Dimensions: 110 (l) x 55 (d) x 128mm (h)
- Dimensions for magnetic version: 110 (l) x 55 (d) x 155mm (h)



LAPS279MAG



LAPR279MAG



LED WORK LAMPS (LAP155 Range)

The dual voltage (12/24V) LAP155 worklamps are manufactured with 5 x 3W LEDs and are available as round and square models, providing an excellent source of working light.



LAPS155



LAPR155

Main Features

- Dual Voltage (12/24V)
- Current draw: 1.25A (12V) - 0.625A (24V)
- IP67 Ingress Protection
- Dimensions: 110 (l) x 51 (d) x 135 mm (h)
- Extra strong polycarbonate lens
- Aluminium housing
- Stainless steel bracket
- 15W/1100 Lumen
- 12 month warranty

BLUE FORKLIFT WARNING LIGHT (FKL15B)

Specifically designed for safety, the FKL15B gives advance warning of approaching forklift vehicles and other traffic in loud environments.



Main Features

- Multi-Voltage (10-48V)
- 5 x 3W Blue LEDs
- IP67 Ingress Protection
- Dimensions: 99 (l) x 85 (d) x 152 mm (h)
- 1100 Lumen
- Strong polycarbonate lens
- Aluminium housing
- 12 month warranty

OEM LED WORK LAMPS



Part No	Voltage	Type	SMD High Power LEDs				Current Draw	Connector	Weight KG (Approx)
			Qty	Watt	Lumen	HV CD			
22806	12-36V	Spot	9	22	2160	5400	1.5A (13.5V) / 0.73A (28V)	280mm cable	0.67
22807	12-36V	Flood	9	22	2160	4100	1.5A (13.5V) / 0.73A (28V)	280mm cable	0.66
22808	12-36V	Flood	8	19	1920	3600	1.5A (13.5V) / 0.67A (28V)	280mm cable	0.62
22809	12-36V	Flood	6	18	1440	3450	1.0A (13.5V) / 0.5A (28V)	280mm cable	0.51
22817	12-36V	Flood	3	8	720	1100	0.6A (13.5V) / 0.3A (28V)	280mm cable	0.17


Material				Resistant			IP Rating	Temperature
Lens	Housing	Bracket	Hardware	Water	Dust	Shock		
PC	Aluminium	Stainless	Steel	✓	✓	✓	IP69K	-30°C - +50°C

LED WORK LIGHT BARS

Our range of straight and curved LED work light bars are manufactured with ultra-bright 3W LEDs giving an impressive working light that can be angled to your exact requirement. Available in 3 different lengths, the SB & BB worklight bars provide a large, well illuminated working area.

Main Features

- EMC approved (ECE R10)
- Voltage: 10-30V
- Available in straight or curved design
- IP67 Ingress Protection
- Strong polycarbonate lens
- Aluminium housing
- Combination of flood and spot reflectors provide excellent working light
- 12 month warranty

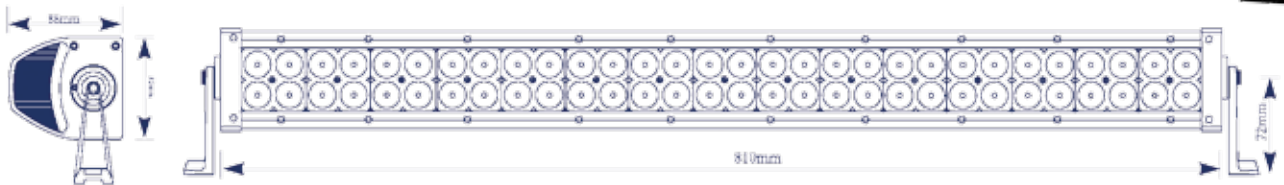

Part No	Style	Length	Number of 3W LEDs	Total Power	Voltage	Lumen
BB31	Curved	31" (810mm)	60	180W	10-30V	12600
BB41	Curved	41" (1060mm)	80	240W	10-30V	16800
BB50	Curved	50" (1260mm)	96	288W	10-30V	20160
SB31	Straight	31" (810mm)	60	180W	10-30V	10800
SB41	Straight	41" (1060mm)	80	240W	10-30V	14400
SB50	Straight	50" (1260mm)	96	288W	10-30V	17280