CLASSIC TITAN LED LIGHTBARS

Combining the latest LED technology with unique optics, the CLASSIC TITAN lightbar range provides a brilliant 360° of visual warning that is ECE R65 approved.

Designed and manufactured in the UK, the CLASSIC TITAN lightbar is built to your exact requirements, offering a variety of flexible options to suit multiple vehicle applications including hazard lights, stop/tail/indicators, alley lights and centre illumination with optional sign writing.

Rubber Mounting Feet


Unique 360° R65 Warning Module 9 x 3W Osram LEDs per Head -Conformal Coated PCB - Four selectable R65 approved flash patterns





Front Facing LED Illuminated Centre Section with Optional Sign Writing (Rear Facing Illumination when Ordered with Stop, Tail, Indicator Light)

Tough Polycarbonate Lens in Clear or Amber

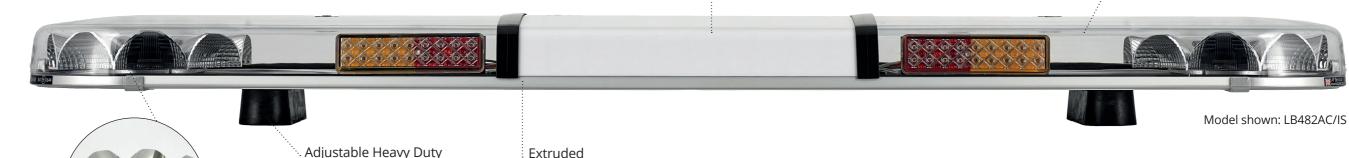

Aluminium Base

Main Features

- Dual Voltage (12/24V)
- 2ft (0.6m), 2½ft (0.76m), 3ft (0.9m), 4ft (1.2m), 5ft (1.5m) & 6ft (1.8m) models available
- Four R65 approved flash patterns (single, double, triple, quad flash)


Telephone: +44 (0)121 386 7377 • www.lapelec.co.uk

- Optional airport flash pattern (upon request)
- 360° high performance optics for improved safety
- Amber or clear polycarbonate lenses
- Extruded aluminium base
- Fully encapsulated electronic control module
- Long life LED technology
- Opal, clear or amber centre sections available
- 4 bolt mounting fix / High rise feet option
- Extreme temperature reliability -30° to +50°
- 2ft Magnetic models available
- 2.5 metre multi-core cable

Special request lightbar service

As we manufacture all our
TITAN lightbars at our UK production
facility we can accommodate any
specification that you require.
Simply contact our customer services
team and we will be happy to assist.

OPTIONAL EXTRAS AVAILABLE RECOVERY LED Stop, Tail, Indicator Light LED R65 Directional Hazard Light Configuration Sign Writing



Centres

Now available with blue LEDs - R65 Class 1 Approved (clear lens)

Components	Current Consumption 12V	Current Consumption 24V
R65 LED Module (x1)	2.00A	1.00A
Centre Illumination (x1)	0.40A	0.20A
Alley Light (x1)	0.30A	0.15A
Hazard Light (x1)	0.30A	0.15A
Stop, Tail, Indicator (x1)	0.60A	0.30A

CLASSIC TITAN LED LIGHTBAR Model Guide These lightbar drawings are for illustration purposes only Stop, Tail, Indicator Light Reflector Module Hazard Light Alley Light Magnetic (A)STI HAZ Lightbar Length - 2ft (610mm) LB242AC LB242AC/MAG LB242WA LB242WA/MAG Lightbar Length - 21/2ft (762mm) LB302AC LB302AC/H LB302WA LB302WA/H Lightbar Length - 3ft (915mm) LB362AC LB362AC/I LB362AC/S LB362WA/S LB362WA LB362WA/I Lightbar Length - 4ft (1220mm) LB482AC LB482AC/I LB482AC/IH LB482AC/IS LB482AC/ISHA LB482AC/IHHA 多级 多级 LB484AC LB484AC/I LB482WA 磁 LB482WA/I LB482WA/IH LB482WA/IS LB484WA LB482WA/ISHA LB482WA/IHHA Lightbar Length - 5ft (1524mm) LB602AC/ISHA LB602AC LB602AC/IS LB602WA LB602WA/IS LB602WA/ISHA

Telephone: +44 (0)121 386 7377 • www.lapelec.co.uk

