


COMPACT ROTATING AND LED LIGHTBARS (CLB Range)




Our Compact Lightbar is designed to provide superior light output and maximum visibility.

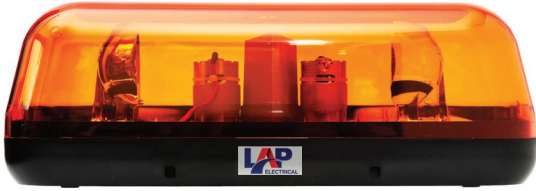

Main Features

- Dual Voltage (12/24V)
- Rotating models supplied with 12V halogen bulbs
- IP56 rated ingress protection
- -30°C to +50°C extreme temperature reliability
- New LED model features 2 x 45 LED reflector modules (R65 approved - double flash pattern)

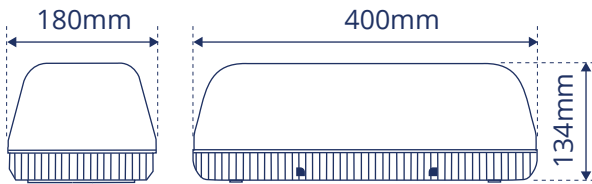

Part No	Voltage	Light Source	Action	Colour	Current Consumption 12/24V	Flash Rate (Per min)	Mounting	Weight KG (Approx)
CLB55SA	12/24V	Halogen	Rotating	Amber	9.2/6.0A	180	Single Point	2.5
CLB55MA	12/24V	Halogen	Rotating	Amber	9.2/6.0A	180	Magnetic	3.2
CLBT162A/SP	12/24V	LED	Double Flash	Amber	4.0/2.0A	120	Single Point	2.0

