


REVERSING ALARMS

High performance safety reversing alarms that are designed to meet the requirements of a wide range of on and off-road vehicle applications.

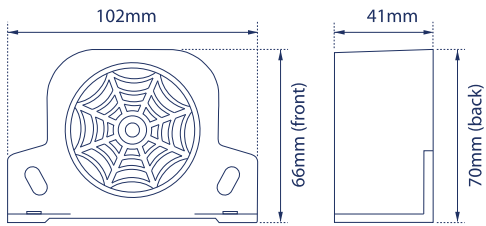

Main Features

- CE and 'E' marked (EMC)
- Available in 87, 92, 97, 102 and 107 dB sound levels
- Night-silent and multi-frequency models available
- Fully weatherproof / pressure washable
- Reverse polarity protected
- Available with wire lead or stud connections
- Epoxy encapsulated housing
- -30°C to +50°C extreme temperature reliability

Part No	Decibels	Voltage	Current Consumption @80Vdc	Mounting	Night Silent	Multi-Frequency	Weight KG (Approx)
Wire Lead Connection							
RA087W	87dB	12-80Vdc	0.1A	Universal			0.30
RA/MF87W	87dB	12/24V	0.1A	Universal		✓	0.32
RA/MF92W	92dB	12/24V	0.2A	Universal		✓	0.32
RA097W	97dB	12-80Vdc	0.2A	Universal			0.30
RA097N	97dB	12-80Vdc	0.2A	Universal	✓		0.30
RA102W	102dB	12-80Vdc	0.25A	Universal			0.30
RA107W	107dB	12-80Vdc	0.4A	Universal			0.30
Stud Terminal							
RA087S	87dB	12-80Vdc	0.1A	Universal			0.32
RA097S	97dB	12-80Vdc	0.2A	Universal			0.32
RA102S	102dB	12-80Vdc	0.25A	Universal			0.32
RA107S	107dB	12-80Vdc	0.4A	Universal			0.32