

# LED R65 LOW PROFILE BEACONS (LPB & LPBC Range)



The LPB Range features a low profile polycarbonate lens with a robust aluminium base and 12 x 3W high performance LEDs that can operate in three flash patterns including simulated rotating.



## Main Features

- Dual Voltage (12/24V)
- 70mph rated on magnetic version
- IP56 rated ingress protection
- Double flash & rotating patterns meet R65 (amber and clear models only)
- Current consumption: 1.8A @ 12V / 24V
- -30°C to +50°C extreme temperature reliability
- Clear lens model – amber flash LEDs



## Lens Colours Available



Amber



Blue




Red



Green



Clear

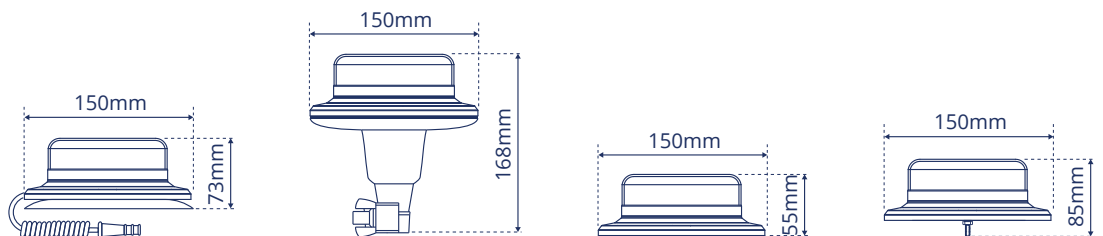

|          |               |               |               |               |
|----------|---------------|---------------|---------------|---------------|
| Part No. | <b>LPB020</b> | <b>LPB040</b> | <b>LPB050</b> | <b>LPB060</b> |
| Fitting  | Magnetic      | Flexi DIN     | 3 Point       | Single Point  |
| Weight   | 0.7KG         | 0.8KG         | 0.5KG         | 0.5KG         |