

LAP-QLUX-S64W



MAIN FEATURES

- Manufactured with 64 x 1W OSRAM LEDs
- 4500 Lumens
- Flood style beam pattern for excellent light spread
- 304 grade stainless steel brackets and fixings
- Mounted dimensions: 110 (L) x 121 (W) x 61mm (H)
- Current consumption: 3.1A @ 12V, 1.6A @ 24V
- 300mm cable length

LAP-QLUX-S36W



MAIN FEATURES


- Manufactured with 36 x 1W OSRAM LEDs
- 3600 Lumens
- Flood style beam pattern for excellent light spread
- 304 grade stainless steel brackets and fixings
- Mounted dimensions: 110 (L) x 124 (W) x 49mm (H)
- Current consumption: 2.1A @ 12V, 1.0A @ 24V
- 300mm cable length

LAP-QLUX-R36W



MAIN FEATURES

- Manufactured with 36 x 1W OSRAM LEDs
- 3600 Lumens
- Flood style beam pattern for excellent light spread
- 304 grade stainless steel brackets and fixings
- Mounted dimensions: 120 (L) x 120 (W) x 49mm (H)
- Current consumption: 2.1A @ 12V, 1.0A @ 24V
- 300mm cable length



LAP-QLUX-F24W



MAIN FEATURES

- Manufactured with 24 x 1W OSRAM LEDs
- 2400 Lumens
- ECE R148 reverse light approved
- Flood style beam pattern for excellent light spread
- 304 grade stainless steel brackets and fixings
- Mounted dimensions: 160 (L) x 59 (W) x 53mm (H)
- Current consumption: 1.8A @ 12V, 0.9A @ 24V
- 300mm cable length

LAP-QLUX-S16W



MAIN FEATURES

- Manufactured with 16 x 1W OSRAM LEDs
- 1600 Lumens
- ECE R148 reverse light approved
- Flood style beam pattern for excellent light spread
- 304 grade stainless steel brackets and fixings
- Mounted dimensions: 75 (L) x 86 (W) x 42mm (H)
- Current consumption: 1.0A @ 12V, 0.5A @ 24V
- 300mm cable length

LAP-QLUX-R16W



MAIN FEATURES

- Manufactured with 16 x 1W OSRAM LEDs
- 1600 Lumens
- ECE R148 reverse light approved
- Flood style beam pattern for excellent light spread
- 304 grade stainless steel brackets and fixings
- Mounted dimensions: 75 (L) x 85 (W) x 44mm (H)
- Current consumption: 1.0A @ 12V, 0.5A @ 24V
- 300mm cable length

LAP22809



MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 6 x 3W LEDs
- 1440 Lumens
- IP67 & IP69K ingress protection
- Stainless steel brackets and fixings
- Dimensions: 105 (L) x 105 (W) x 55mm (H)
- Current consumption: 1.0A @ 12V, 0.4A @ 24V

LAPS4816



MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 16 x 3W LEDs
- 2800 Lumens
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 110 (L) x 110 (W) x 70mm (H)
- Current consumption: 2.7A @ 12V, 1.4A @ 24V

LAPS279



MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 9 x 3W LEDs
- 1800 Lumens
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 110 (L) x 110 (W) x 70mm (H)
- Current consumption: 2.1A @ 12V, 1.1A @ 24V

LAPS279S



MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 9 x 3W LEDs
- 1620 Lumens
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 110 (L) x 110 (W) x 70mm (H)
- Current consumption: 2.1A @ 12V, 1.1A @ 24V



On/Off Switch
Manufactured with on/off switch

LAPS155



MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 5 x 3W LEDs
- 1000 Lumens
- IP67 ingress protection
- Powder coated brackets and fixings
- Dimensions: 110 (L) x 110 (W) x 35mm (H)
- Current consumption: 1.3A @ 12V, 0.6A @ 24V

LAPS128



MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 8 x 1.5W LEDs
- 1040 Lumens
- IP68 & IP69K ingress protection
- Stainless steel brackets and fixings
- Dimensions: 52 (L) x 52 (W) x 32mm (H)
- Current consumption: 0.8A @ 12V, 0.4A @ 24V

ROUND LED WORK LAMP RANGE

VARIOUS SIZES & LIGHT OUTPUTS AVAILABLE

LAPR279



MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 9 x 3W LEDs
- 1800 Lumens
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 110 (L) x 110 (W) x 70mm (H)
- Current consumption: 2.1A @ 12V, 1.1A @ 24V

LAPR248



MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 8 x 3W LEDs
- 1800 Lumens
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 142 (L) x 90 (W) x 62mm (H)
- Current consumption: 1.7A @ 12V, 0.9A @ 24V

LAPF248



MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 8 x 3W LEDs
- 1600 Lumens
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 160 (L) x 45 (W) x 45mm (H)
- Current consumption: 1.7A @ 12V, 0.9A @ 24V

MISCELLANEOUS WORK LAMP RANGE

RECTANGULAR, MAGNETIC AND MINI SCENE LIGHTS

LAPQ4515



MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 15 x 3W LEDs
- 4500 Lumens
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 158 (L) x 121 (W) x 69mm (H)
- Current consumption: 3.8A @ 12V, 1.9A @ 24V

LAP279MAG



MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 9 x 3W LEDs
- 1800 Lumens
- Square & round models available
- Magnetic base and cigarette/DIN plug
- Dimensions: 110 (L) x 125 (W) x 70mm (H)
- Current consumption: 2.1A @ 12V, 1.1A @ 24V

LAPCV404 & 417



MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 3 x 5W LEDs
- LAPCV404 (white) & LAPCV417 (black)
- 1000 Lumens
- IP67 ingress protection
- Supplied with rubber mounting bracket
- Dimensions: 78 (L) x 43 (W) x 24mm (H)
- Current consumption: 1.3A @ 12V, 0.6A @ 24V



63201855
30° rubber
mounting
bracket
available

LAPCV405 & LAPCV406



LAPCV405



LAPCV406

MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 52 x 1W OSRAM LEDs
- 4680 Lumens
- Straight housing
- IP68 and IP69K ingress protection
- Angled flood beam
- Dimensions: 150 (L) x 47 (W) x 40mm (H)

Part Number	Housing Colour	Current @ 12V / 24V
LAPCV405	Black	1.5A / 0.8A
LAPCV406	White	1.5A / 0.8A

LAPCV407 & LAPCV408



LAPCV407



LAPCV408

MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 20 x 1W OSRAM LEDs
- 2000 Lumens
- Curved housing
- IP67 ingress protection
- Angled flood beam
- Dimensions: 231 (L) x 47 (W) x 40mm (H)

Part Number	Housing Colour	Current @ 12V / 24V
LAPCV407	Black	1.6A / 0.8A
LAPCV408	White	1.6A / 0.8A

LAPCV409 & LAPCV410



LAPCV409



LAPCV410

MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 32 x 1W OSRAM LEDs
- 3200 Lumens
- Curved housing
- IP67 ingress protection
- Angled flood beam
- Dimensions: 312 (L) x 47 (W) x 40mm (H)

Part Number	Housing Colour	Current @ 12V / 24V
LAPCV409	Black	2.7A / 1.3A
LAPCV410	White	2.7A / 1.3A

LAPCV411 & LAPCV412



LAPCV411



LAPCV412

MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 46 x 1W OSRAM LEDs
- 4600 Lumens
- Curved housing
- IP67 ingress protection
- Angled flood beam
- Dimensions: 392 (L) x 55 (W) x 48mm (H)

Part Number	Housing Colour	Current @ 12V / 24V
LAPCV411	Black	3.8A / 1.9A
LAPCV412	White	3.8A / 1.9A

STRØLUX LED WORK LIGHT BAR RANGE

AVAILABLE IN SINGLE & DOUBLE ROW MODELS



STRØLUX RANGE



SLX1-10



SLX2-22

MAIN FEATURES

- Multi-voltage (10-30V)
- Single & double LED row models available
- Manufactured with 5W OSRAM LEDs
- IP67 & IP69K ingress protection
- Strong polycarbonate lens
- Aluminium housing
- Combination of flood and spot reflectors



SLX1-31



SLX2-42

Style	Part Number	Length	5W Osram LEDs	Lumens	Dimensions (mm)		Current (A)	
					Height	Depth	@ 12V	@ 24V
Single Row	SLX1-07	7" / 177mm	6	2520	40	54	2.1	1.1
	SLX1-10	10" / 246mm	9	3780	40	54	3.4	1.7
	SLX1-21	21" / 522mm	21	8820	40	54	8.0	3.9
	SLX1-31	31" / 798mm	33	13860	40	54	12.5	6.1
	SLX1-40	40" / 1005mm	42	17640	40	54	14.9	7.8
Double Row	SLX1-50	50" / 1281mm	54	19340	40	54	19.2	10.1
	SLX2-03	3" / 70mm	4	1920	72	60	1.5	0.8
	SLX2-08	8" / 204mm	12	5040	70	67	3.8	2.0
	SLX2-14	14" / 357mm	24	10080	70	67	7.7	4.0
	SLX2-22	22" / 561mm	40	16800	70	67	14.6	7.2
	SLX2-32	32" / 815mm	60	25200	70	67	20.8	10.1
	SLX2-42	42" / 1076mm	80	33600	70	67	28.3	14.3
SLX2-50	50" / 1274mm	96	40320	70	67	30.6	16.4	

BB & SB LED WORK LIGHT BAR RANGE

AVAILABLE IN STRAIGHT & CURVED MODELS

BB & SB RANGE



SB04




SB31



BB41

MAIN FEATURES

- Multi-voltage (10-30V)
- Available in straight or curved design
- Strong polycarbonate lens
- IP67 ingress protection
- Aluminium housing
- Combination of flood and spot reflectors
- 1 year warranty

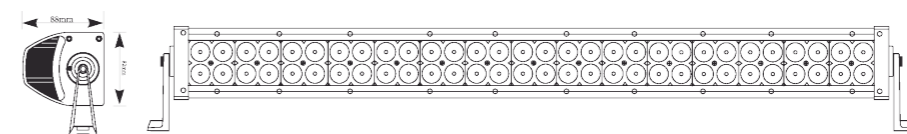

Part Number	Style	Length	Number of 3W LEDs	Total Power	Lumens
BB31	Curved	31" / 810mm	60	180W	13200
BB41	Curved	41" / 1060mm	80	240W	17600
BB50	Curved	50" / 1260mm	96	288W	21200
SB04	Straight	4" / 98mm	6	18W	1500
SB08	Straight	8" / 203mm	12	36W	2640
SB12	Straight	12" / 295mm	20	60W	4200
SB22	Straight	22" / 550mm	40	120W	8800
SB31	Straight	31" / 810mm	60	180W	13200
SB41	Straight	41" / 1060mm	80	240W	17600
SB50	Straight	50" / 1260mm	96	288W	21200

